


Semi Integrated - Kronos TL

Technical Data

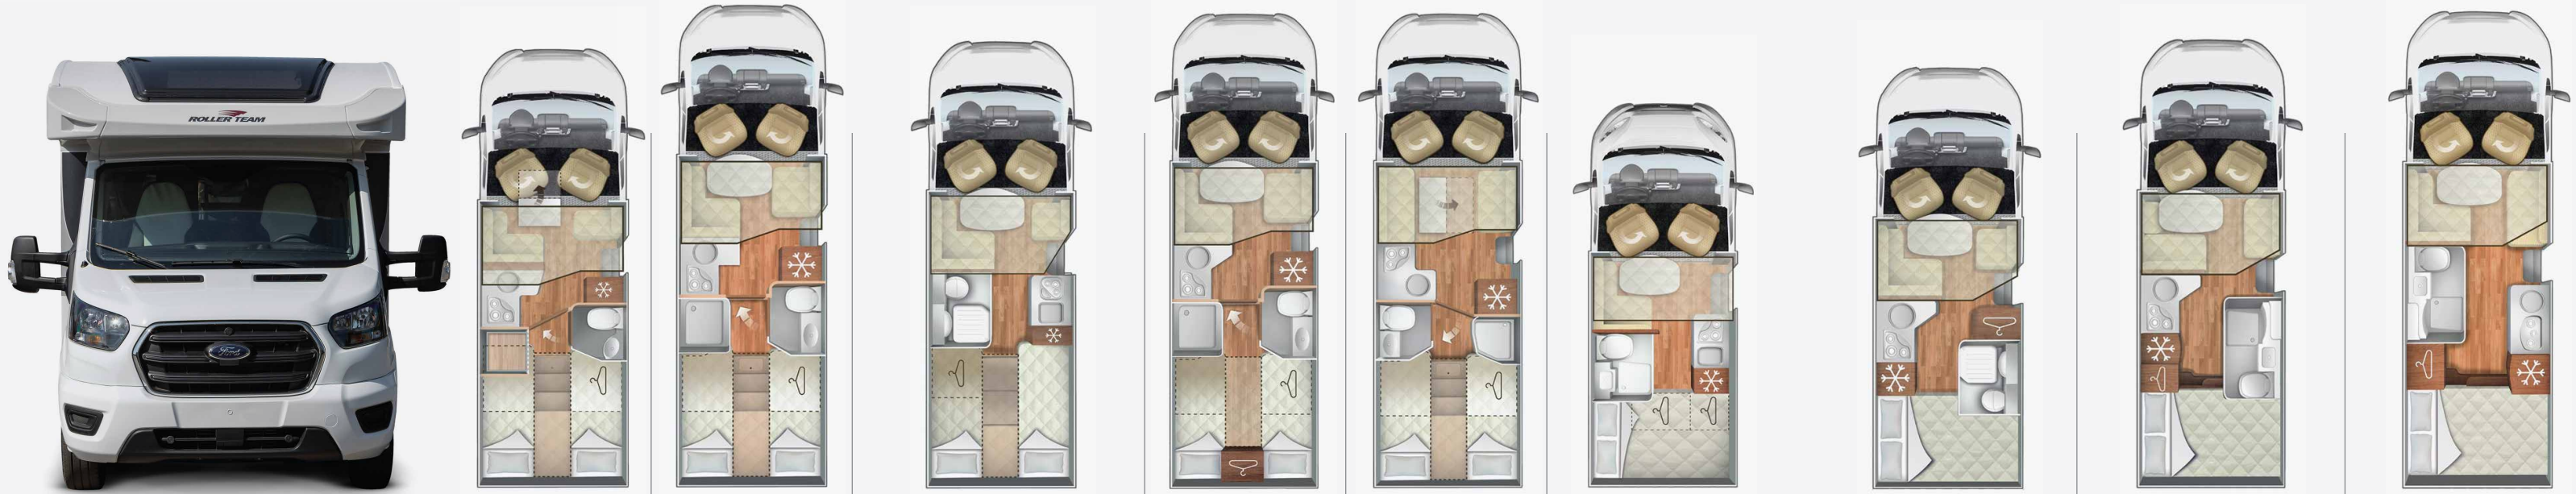

	283 TL		284 TL		285 TL		286 TL		287 TL		291TL		294 TL		295TL		298 TL	
MECHANICAL UNIT / CHASSIS																		
Mechanical unit	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato	Ford Transit	Fiat Ducato
Engine	2.0 TDI 130 CV	2.3 MJ 120 CV	2.0 TDI 130 CV	2.3 MJ 120 CV	2.0 TDI 130 CV	2.3 MJ 120 CV	2.0 TDI 130 CV	2.3 MJ 120 CV	2.0 TDI 130 CV	2.3 MJ 120 CV	2.0 TDI 130 CV	2.3 MJ 120 CV	2.0 TDI 130 CV	2.3 MJ 120 CV	2.0 TDI 130 CV	2.3 MJ 120 CV	2.0 TDI 130 CV	2.3 MJ 120 CV
Max. allowed weight (Kg)	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500	3500
Weight in running order (Min / Max Kg)	2935 / 3077	2898 / 3077	3015 / 3072	2978 / 3072	2935 / 3077	2898 / 3077	3015 / 3072	2978 / 3072	3025 / 3157	2988 / 3157	2935 / 3127	2900 / 3170	2885 / 3082	2848 / 3082	2925 / 3077	2888 / 3077	3005 / 3072	2968 / 3072
Payload (Min / Max Kg)	423 / 565	423 / 602	428 / 485	428 / 522	423 / 565	423 / 602	428 / 485	428 / 522	343 / 457	343 / 512	373 / 565	600 / 330	418 / 615	418 / 652	423 / 575	423 / 612	428 / 495	428 / 532
Wheelbase (mm)	3750	4035	3954	3800	3750	3800	3954	4035	3954	4035	3300	3450	3300	3450	3750	3800	3954	4035
Motorhome weight plus trailer (kg)	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500	5065	5500
Wheels dimensions	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"	16"	15"
DIMENSIONS AND PLACES																		
External length (mm) / External width (mm)	6990 / 2350		7450 / 2350		6990 / 2350		7450 / 2350		7450 / 2350		5990 / 2350		6470 / 2350		6990 / 2350		7450 / 2350	
External height (mm) / Internal height (mm)	2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080		2950 / 2080	
Approved seats	5		5		5		5		4		4		5		5		5	
Beds (optional dinette)	4 (5 0)		4 (5 0)		4 (5 0)		4 (5 0)		4 (0 5)		4		4 (5 0)		4 (5 0)		4 (5 0)	
Extra bed from the convertible dinette	0		0		0		0		0		-		-		0		0	
Rear bed (cm)	180x80 - 189x80		220x80 / 194x80		199x80 - 186x80		220x80 / 194x80		200x80 / 194x80		213x125(118)		216x135(118)		216x135(120)		207x129	
Additional auxiliary bed in dinette (cm)	216x87(54)		212x54		212x54		212x54		212x100		198x92		212 x 113 (50)		216 x 90 (50)		216x83	
Overcab bed (cm) / Elevating Bed (cm)	- / 190x116(95)		- / 190x128(107)		- / 190x128(107)		- / 190x128(107)		- / 190x128(107)		- / 190x95		- / 190x116(95)		- / 190x133(124)		- / 190x133(124)	
Additional rear bed seat	S		S		S		-		S		-		-		-		-	
Sliding bed system	-		-		-		-		-		-		-		-		-	
Locker (useful opening, cm)	117x87(72) / 117x87(72)		117x87(72) / 117x87(72)		117x87 (72)- 100x67 / 117x87 (72)- 107x60		72x87(72) / 72x87(72)		117x87(72) / 117x87(72)		117x60 / 117x60		130x102(72) / 100x67		130x102(72) / 130x102(72)		130x102(72) / 130x102(72)	
Max. internal garage height (mm)	126		119		119		75		120		128		130		130		130	
Floor / walls / roof thickness (mm)	54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31		54 / 31 / 31	
Floor / walls / roof material (mm)	VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR		VTR / VTR / VTR	
Fiberglass roof, hail-proof	S		S		S		S		S		S		S		S		S	
INSTALLATIONS																		
Burners / Gas oven / Suction hood	3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -		3 / 0 / -	
Tank capacity: clear water / wastewater (L**)	(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100		(20)100 / 120 (20)100 / 100	
Automatic trivalent fridge (220V, 12V, gas) (L)	140		140		140		140		140		140		140		140		140	
Standard heating system	Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W		Gas Combi 4000 W	
SKYLIGHTS																		
Panoramic Roof (mm)	S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)		S (1000x800)	
Rear window (mm)	400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)		400x400 (0 700x500)	
Central skylight (mm)	400x400		400x400		400x400		400x400		400x400		400x400		400x400		400x400		400x400	
Skylight dinette	-		-		-		-		-		-		-		-		-	
Skylight toilette/shower	- / S		- / S		- / S		- / S		- / S		- / S		- / S		- / S		- / S	
STANDARD EQUIPMENT																		
Painted front bumper	S		S		S		S		S		S		S		S		S	
16 " wheels (FORD)	S		S		S		S		S		S		S		S		S	
Solar Panel	S		S		S		S		S		S		S		S		S	
Rear camera	S		S		S		S		S		S		S		S		S	
Entrance door with fixed window	S		S		S		S		S		S		S		S		S	
Flyscreen for entrance door	S		S		S		S		S		S		S		S		S	
ESC (FIAT) ESP (FORD)	S		S		S		S		S		S		S		S		S	
Integrated DAB radio antenna & bluetooth radio with steering wheel controls (FORD)	S		S		S		S		S		S		S		S		S	
Manual air conditioning	S		S		S		S		S		S		S		S		S	
Driver and Passenger airbag	S		S		S		S		S		S		S		S		S	
Cruise Control with speed limiter	S		S		S		S		S		S		S		S		S	
Swivelling driver' and passenger's seat	S		S		S		S		S		S		S		S		S	
Beds with staves	S		S		S		S		S		S		S		S		S	

The mass of the approved vehicle includes: driver (75 Kg), diesel tank filled to 100% (60 liters), fresh water filled to 20 liters. (use of the special exhaust valve) and aluminum gas cylinders (max. 15 kg.) full to 90% of their capacity, and tolerance foreseen in the approval phase (+/- 5%) (2007/46 / EC). Anything not included in the standard version of the vehicle, both airframe and chassis, leads to an increase in the curb weight with the consequent reduction of the payload up to the possible reduction of homologated seats in case the total weight is the value of the available payload . The available payloads result from the difference between the maximum permissible mass and the mass in running order and have a tolerance of 5%. During the purchase phase, it is necessary to check the weight of the options to be installed on the vehicle.

S= standard 0=optional - = unavailable VTR= Fiberglass