


Semi Integrated - Zefiro TL

Technical Data

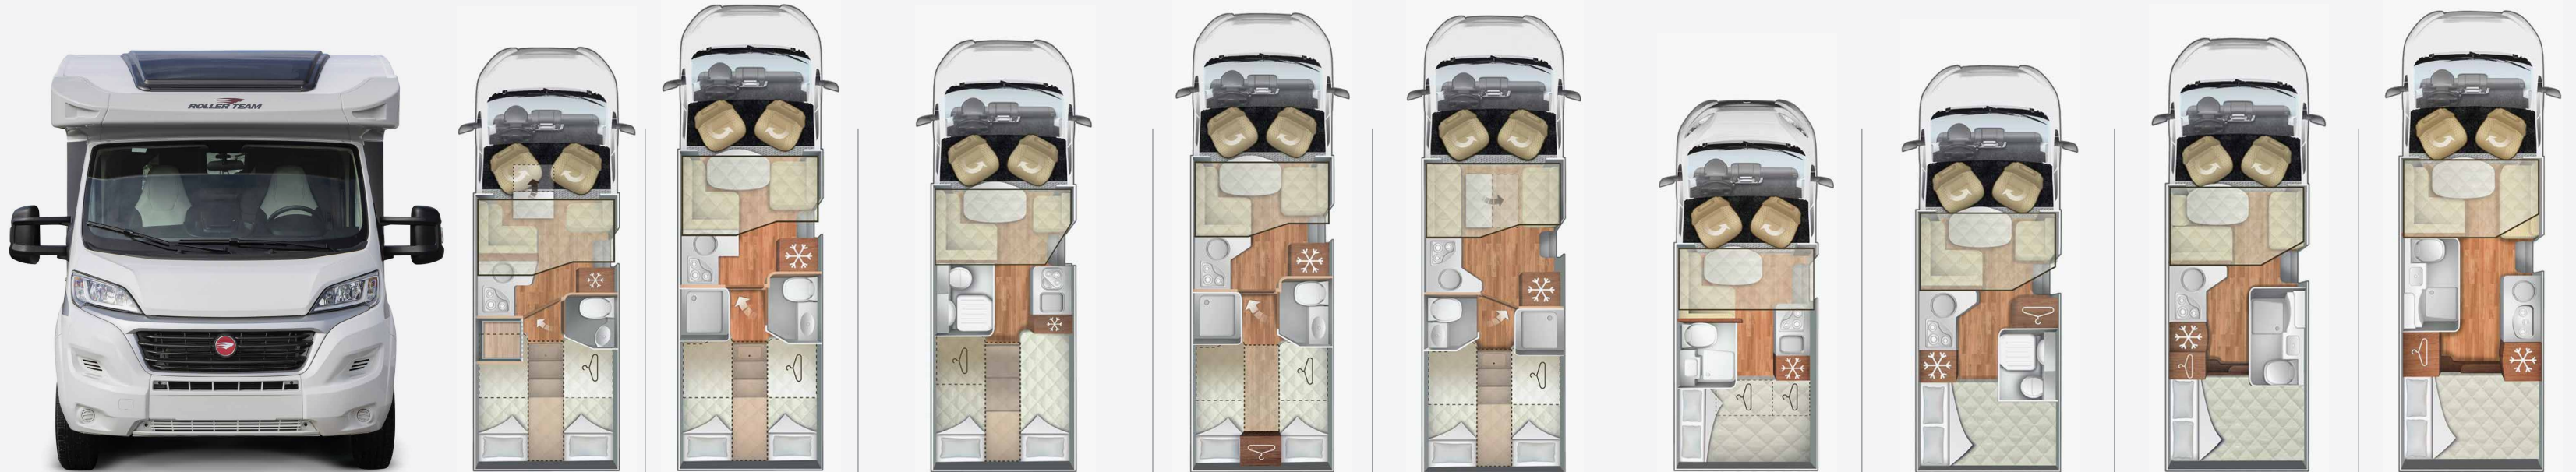

	283 TL	284 TL	285 TL	286 TL	287 TL	291 TL	294 TL	295 TL	298 TL
MECHANICAL UNIT / CHASSIS									
Mechanical unit	Fiat Ducato	Fiat Ducato	Fiat Ducato	Fiat Ducato	Fiat Ducato	Fiat Ducato	Fiat Ducato	Fiat Ducato	Fiat Ducato
Engine	2.3 MJ 120 CV	2.3 MJ 120 CV	2.3 MJ 120 CV	2.3 MJ 120 CV	2.3 MJ 120 CV	2.3 MJ 120 CV	2.3 MJ 120 CV	2.3 MJ 120 CV	2.3 MJ 120 CV
Max. allowed weight (Kg)	3500	3500	3500	3500	3500	3500	3500	3500	3500
Weight in running order (Min / Max Kg)	2998 / 3077	2978 / 3072	2898 / 3077	2978 / 3072	2988 / 3157	2900 / 3170	2848 / 3082	2888 / 3077	2968 / 3072
Payload (Min / Max Kg)	423 / 602	428 / 522	423 / 602	428 / 522	343 / 512	600 / 330	418 / 652	423 / 612	428 / 532
Wheelbase (mm)	4035	3800	3800	4035	4035	3450	3450	3800	4035
Motorhome weight plus trailer (kg)	5500	5500	5500	5500	5500	2000	2000	2000	2000
Wheels dimensions	15"	15"	15"	15"	15"	15"	15"	15"	15"
DIMENSIONS AND PLACES									
External length (mm) / External width (mm)	6990 / 2350	7450 / 2350	6990 / 2350	7450 / 2350	7450 / 2350	5990 / 2350	6470 / 2350	6990 / 2350	7450 / 2350
External height (mm) / Internal height (mm)	2950 / 2080	2950 / 2080	2950 / 2080	2950 / 2080	2950 / 2080	2950 / 2080	2950 / 2080	2950 / 2080	2950 / 2080
Approved seats	5	5	5	5	4	4	5	5	5
Beds (optional dinette)	4 (5 0)	4 (5 0)	4 (5 0)	4 (5 0)	4 (0 5)	4	4 (5 0)	4 (5 0)	4 (5 0)
Extra bed from the convertible dinette	0	0	0	0	0	-	0	0	0
Rear bed (cm)	180x80 - 189x80	220x80 / 194x80	199x80 - 186x80	220x80 / 194x80	200x80 / 194x80	213x125(118)	216x135(118)	216x135(120)	207x129
Additional auxiliary bed in dinette (cm)	216x87(54)	212x54	212x54	212x54	212x100	198x92	212 x 113 (50)	216 x 90 (50)	216x83
Overcab bed (cm) / Elevating Bed (cm)	- / 190x116(95)	- / 190x128(107)	- / 190x128(107)	- / 190x128(107)	- / 190x128(107)	- / 190x95	- / 190x116(95)	- / 190x128(107)	- / 190x133(124)
Additional rear bed seat	S	S	S	-	S	-	-	-	-
Sliding bed system	-	-	-	-	-	-	S	S	S
Locker (useful opening, cm)	117x87(72) / 117x87(72)	117x87(72) / 117x87(72)	117x87 (72)- 100x67 / 117x87 (72)- 107x60	72x87(72) / 72x87(72)	117x87(72) / 117x87(72)	117x60 / 117x60	130x102(72) / 100x67	130x102(72) / 130x102(72)	130x102(72) / 130x102(72)
Max. internal garage height (mm)	126	119	119	75	120	128	130	130	130
Floor / walls / roof thickness (mm)	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31	54 / 31 / 31
Floor / walls / roof material (mm)	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR
Fiberglass roof, hail-proof	S	S	S	S	S	S	S	S	S
INSTALLATIONS									
Burners / Gas oven / Suction hood	3 / 0 / -	3 / 0 / -	3 / 0 / -	3 / 0 / -	3 / 0 / -	3 / 0 / -	3 / 0 / -	3 / 0 / -	3 / 0 / -
Tank capacity: clear water / wastewater (L**)	(20)100 / 120 (20)100 / 100	(20)100 / 120 (20)100 / 100	(20)100 / 120 (20)100 / 100	(20)100 / 120 (20)100 / 100	(20)100 / 120 (20)100 / 100	(20)100 / 120 (20)100 / 100	(20)100 / 120 (20)100 / 100	(20)100 / 120 (20)100 / 100	(20)100 / 120 (20)100 / 100
Automatic trivalent fridge (220V, 12V, gas) (L)	140	140	140	140	140	140	140	140	140
Standard heating system	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W
SKYLIGHTS									
Panoramic Roof (mm)	S (1000x800)	S (1000x800)	S (1000x800)	S (1000x800)	S (1000x800)	S (1000x800)	S (1000x800)	S (1000x800)	S (1000x800)
Rear window (mm)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)
Central skylight (mm)	400x400	400x400	400x400	400x400	400x400	400x400	400x400	400x400	400x400
Skylight dinette	-	-	-	-	-	-	-	-	-
Skylight toilette/shower	- / S	- / S	- / S	- / S	- / S	- / S	- / S	- / S	- / S
STANDARD EQUIPMENT									
Painted front bumper	S	S	S	S	S	S	S	S	S
Solar Panel	S	S	S	S	S	S	S	S	S
Double rear camera with parking function	S	S	S	S	S	S	S	S	S
Entrance door with fixed window	S	S	S	S	S	S	S	S	S
Flyscreen for entrance door	S	S	S	S	S	S	S	S	S
Strip opening with locker	S	S	S	S	S	S	S	S	S
ESC (FIAT)	S	S	S	S	S	S	S	S	S
Integrated DAB radio antenna & 2 DIN radio with Carplay	S	S	S	S	S	S	S	S	S
Manual air conditioning	S	S	S	S	S	S	S	S	S
Driver and Passenger airbag	S	S	S	S	S	S	S	S	S
Cruise Control with speed limiter	S	S	S	S	S	S	S	S	S
Swivelling driver' and passenger's seat	S	S	S	S	S	S	S	S	S
Beds with staves	S	S	S	S	S	S	S	S	S

The mass of the approved vehicle includes: driver (75 Kg), diesel tank filled to 100% (60 liters), fresh water filled to 20 liters. (use of the special exhaust valve) and aluminum gas cylinders (max. 15 kg.) full to 90% of their capacity, and tolerance foreseen in the approval phase (+/- 5%) (2007/46 / EC). Anything not included in the standard version of the vehicle, both airframe and chassis, leads to an increase in the curb weight with the consequent reduction of the payload up to the possible reduction of homologated seats in case the total weight is the value of the available payload . The available payloads result from the difference between the maximum permissible mass and the mass in running order and have a tolerance of 5%. During the purchase phase, it is necessary to check the weight of the options to be installed on the vehicle.

S= standard 0=optional - = unavailable

VTR= Fiberglass