

Semi Integrated - Granduca

Technical Data




Low Profile



267 P



287 P

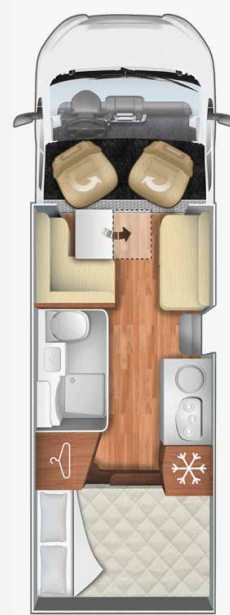

298 P

Elevating Bed



267 TL



287 TL



298 TL

	267 P	287 P	298 P	267 TL	287 TL	298 TL
MECHANICAL UNIT / CHASSIS						
Mechanical unit	Fiat Ducato	Fiat Ducato	Fiat Ducato	Fiat Ducato	Fiat Ducato	Fiat Ducato
Engine	2.3 MJ 120 CV	2.3 MJ 120 CV	2.3 MJ 120 CV	2.3 MJ 120 CV	2.3 MJ 120 CV	2.3 MJ 120 CV
Max. allowed weight (Kg)	3500	3500	3500	3500	3500	3500
Weight in running order (Min / Max Kg)	3103 / 3157	3103 / 3157	3103 / 3157	3103 / 3157	3103 / 3157	3103 / 3157
Payload (Min / Max Kg)	343 / 397	343 / 397	343 / 397	343 / 397	343 / 397	343 / 397
Wheelbase (mm)	4035	4035	4035	4035	4035	4035
Motorhome weight plus trailer (kg)	5500	5500	5500	5500	5500	5500
Wheels dimensions	15"	15"	15"	15"	15"	15"
DIMENSIONS AND PLACES						
External length (mm) / External width (mm)	7450 / 2350	7450 / 2350	7450 / 2350	7450 / 2350	7450 / 2350	7450 / 2350
External height (mm) / Internal height (mm)	3050 / 2080	3050 / 2080	3050 / 2080	3050 / 2080	3050 / 2080	3050 / 2080
Approved seats	4	4	4	4	4	4
Beds (optional dinette)	3	3	3	4 (0 5)	4 (0 5)	4 (0 5)
Extra bed from the convertible dinette	S	S	S	0	0	0
Rear bed (cm)	190x150	194x80 – 194x80	215x135	190x150	194x80 – 194x80	215x135
Additional auxiliary bed in dinette (cm)	216x86	216x86	216x86	216x86	216x86	216x86
Overcab bed (cm) / Elevating Bed (cm)	- / 190x128(107)	- / 190x128 (107)	- / 190x133(124)	- / 190x128(107)	- / 190x128 (107)	- / 190x133(124)
Additional rear bed seat	-	S	-	-	S	-
Sliding bed system	-	-	-	-	-	-
Locker (useful opening, cm)	117x87(72) / 117x 87(72)	117x87(72) / 117x 87(72)	130x102(72) / 130x102(72)	117x87(72) / 117x 87(72)	117x87(72) / 117x 87(72)	130x102(72) / 130x102(72)
Max. internal garage height (mm)	122	119	135	122	119	135
Floor / walls / roof thickness (mm)	38 - 22 / 31 / 31	38 - 22 / 31 / 31	38 - 22 / 31 / 31	38 - 22 / 31 / 31	38 - 22 / 31 / 31	38 - 22 / 31 / 31
Floor / walls / roof material (mm)	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR	VTR / VTR / VTR
Fiberglass roof, hail-proof	S	S	S	S	S	S
INSTALLATIONS						
Burners / Gas oven / Suction hood	3 / 0 / -	3 / 0 / -	3 / 0 / -	3 / 0 / -	3 / 0 / -	3 / 0 / -
Tank capacity: clear water / wastewater (L**)	(20)80 / 80	(20)80 / 80	(20)80 / 80	(20)80 / 80	(20)80 / 80	(20)80 / 80
Automatic trivalent fridge (220V, 12V, gas) (L)	150	150	150	150	150	150
Standard heating system	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W	Gas Combi 4000 W
SKYLIGHTS						
Panoramic Roof (mm)	S (1000x800)	S (1000x800)	S (1000x800)	S (1000x800)	S (1000x800)	S (1000x800)
Rear window (mm)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)	400x400 (0 700x500)
Central skylight (mm)	400x400	400x400	400x400	400x400	400x400	400x400
Skylight dinette	700x500	700x500	700x500	-	-	-
Skylight toilette/shower	-	-	S	-	-	S
STANDARD EQUIPMENT						
Painted front bumper	S	S	S	S	S	S
15 " wheels	S	S	S	S	S	S
Solar Panel	S	S	S	S	S	S
Rear camera	S	S	S	S	S	S
Two-point XL door with central locking	S	S	S	S	S	S
Flyscreen for entrance door	S	S	S	S	S	S
ESC (FIAT)	S	S	S	S	S	S
Integrated DAB radio antenna	S	S	S	S	S	S
Manual air conditioning	S	S	S	S	S	S
Driver and Passenger airbag	S	S	S	S	S	S
Cruise Control with speed limiter	S	S	S	S	S	S
Swivelling driver' and passenger's seat	S	S	S	S	S	S
Technical double floor	S	S	S	S	S	S
Beds with staves	S	S	S	S	S	S

The mass of the approved vehicle includes: driver (75 Kg), diesel tank filled to 100% (60 liters), fresh water filled to 20 liters. (use of the special exhaust valve) and aluminum gas cylinders (max. 15 kg.) full to 90% of their capacity, and tolerance foreseen in the approval phase (+/- 5%) (2007/46 / EC). Anything not included in the standard version of the vehicle, both airframe and chassis, leads to an increase in the curb weight with the consequent reduction of the payload up to the possible reduction of homologated seats in case the total weight is the value of the available payload . The available payloads result from the difference between the maximum permissible mass and the mass in running order and have a tolerance of 5%. During the purchase phase, it is necessary to check the weight of the options to be installed on the vehicle.

S= standard 0=optional - = unavailable

VTR= Fiberglass